



NRG: Solid state relays with communication interface


Switches

NRG series

Digital solid state relays

In order for machine builders to make informed decisions, solve urgent problems on short notice and develop machines that are more autonomous, data from the various components within the machine needs to be collected and analysed. The **NRG** has been developed to fit this purpose. Through the added communication interface, the solid state relays (SSRs) can exchange data with the machine controller in real-time. The switching of the SSRs can be controlled through this communication interface.

The **NRG** is a platform consisting of bus chains. Each bus chain is made up of an NRG controller daisy chained to a number of SSRs. The NRG controller interfaces with the machine controller (or PLC) and is available in Modbus RTU or PROFINET.

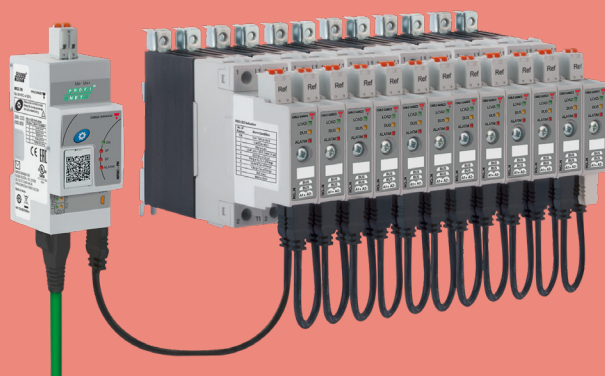

Reduced unplanned downtime with real-time monitoring

Benefits

Predictive and better preventive maintenance plans

Condition based monitoring is essential to reduce unplanned machine stoppages. The NRG Load deviation alarm alerts of potential load failures prior to these happening. The SSR and Load running hours data helps maintainers schedule better preventive maintenance plans.

Versatility and flexibility

Monitoring solutions external to the SSR are limited in the data they can provide. The NRG provides a much more complete status that enables process improvements and can also be used to optimise energy management plans.

Precise temperature control

Specific applications may necessitate a very fine switching resolution. With power control mode a 1% resolution is possible, whilst with ON/OFF mode, SSRs can be switched every half mains cycle.

Panel space savings

With integrated switching, monitoring and diagnostics in the smallest solid state relay platform on the market, the NRG solution saves on valuable panel space. Compared to other monitoring solutions it eliminates the need of external current transformers, PLC analogue and digital cards.

Time labour savings in wiring

In the NRG system, all data transfer, error monitoring as well as load switching is done via the communication network thus eliminating all the extensive wiring required to connect external monitoring components and PLC cards.

Ready for IIoT

Through digitalization, machines can be accessed from any remote location. The communication interface on the NRG enables remote access down to the SSR level.

Applications

The NRG is the ideal switching solution when monitoring of the field level devices is required to minimise expensive downtimes. In addition to the switching function, the NRG integrates monitoring circuitry, in the same footprint, to enable exchange of data with the machine controller. The NRG solid state relays are suited for heating applications. Typical applications include:


- Plastic injection machines
- PET blow moulding machines
- Packaging machines
- Semiconductor manufacturing machinery
- Glass tempering machines



Digital solid state relays tailored for an IIoT environment

The industrial automation industry is at the outset of a new era of innovation with the hype of Industry 4.0. Data is at the core of this revolution and the NRG system of solid state relays fits right in the digital thread of information. On top of switching capabilities, the NRG digital solid state relays can

exchange monitoring and diagnostic data with the machine controller via the communication interface. This data can be further processed and analysed in a cloud system which would inflict a new horizon of opportunities for enhanced process automation, optimisation and part quality.

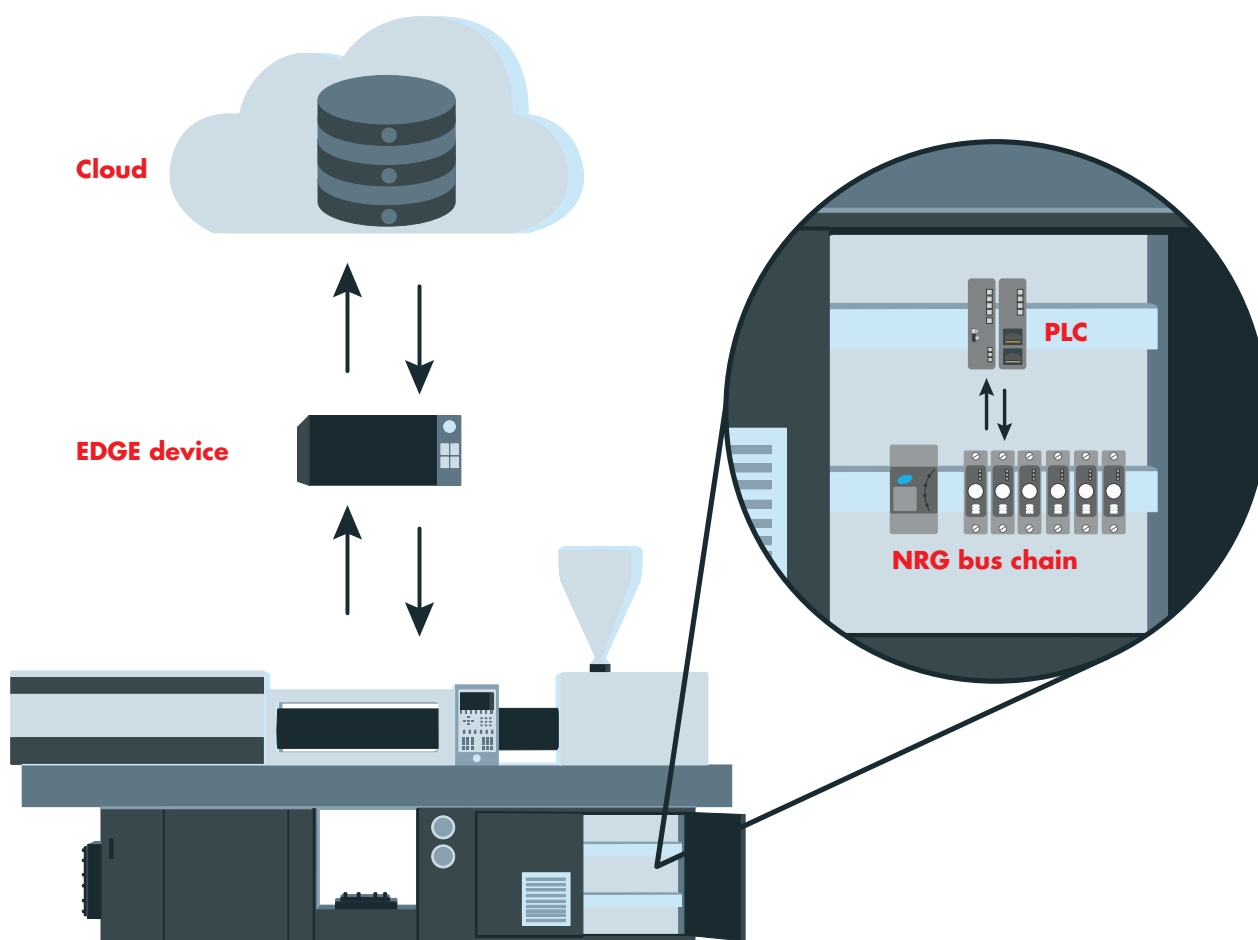

NRG series

An all-in-one cost-effective switching and monitoring

Compact

Minimum product width of 17.8 mm for a 37 AAC SSR that integrates both switching and monitoring

Data

A number of parameters accessible in real-time from each SSR enable process improvements

Connectivity

Use of common industrial protocols enable easy integration in industrial machinery

Reduced hardware

No additional components for monitoring; the bus eliminates PLC output and input cards

Flexibility

Various power control modes are available for all application requirements

Predictive maintenance

Possible via SSR running hours and Load resistance monitoring

Quick setup

Automatic addressing of all solid state relays on the NRG bus chain

Fast troubleshooting

Detailed system and network fault analysis via the communication system


Communication

Available in:
PROFINET, Modbus RTU



Switching

Up to 90 AAC, 600 VAC

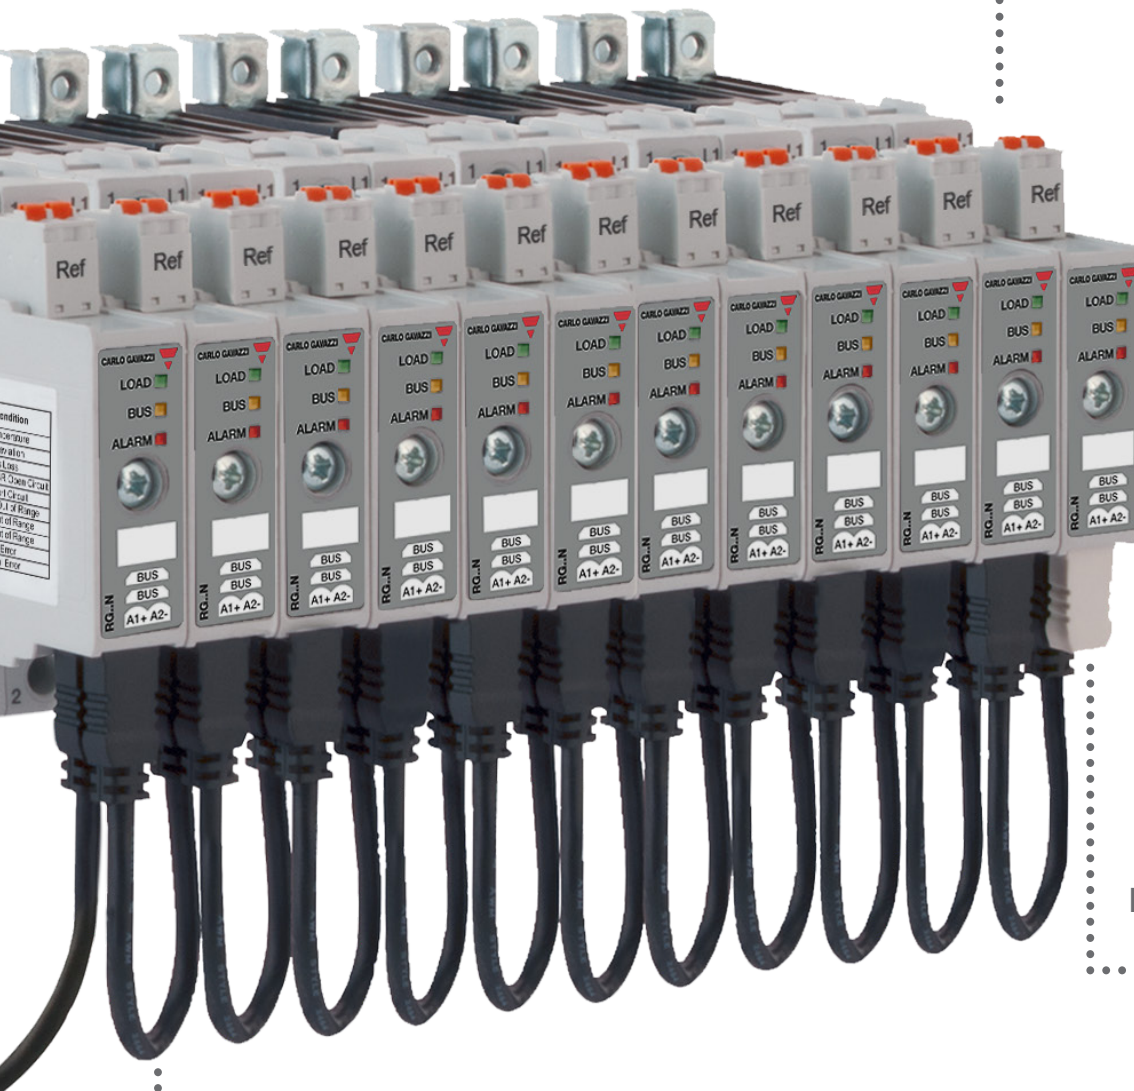

Diagnostics

Immediate system and SSR fault detection

Real-time monitoring

of Current, Voltage, Power,
Energy consumption and Running hours


NRG series

Features

The NRG bus chain components

The NRG is a sub-system that consists of one or more BUS chains that interact with the main controller or PLC in the machine via the communication interface. The NRG bus chain can have a maximum of 32 NRG solid state relays. The communication link between the NRG controller and the relays is the Internal BUS.

When more solid state relays are needed in a system, multiple BUS chains can be utilised. Standard protocol topologies can be adopted depending on the communication interface in use.

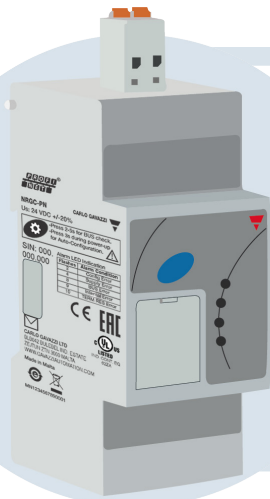


NRG Controller

The NRG controller is the main interface between the PLC and the NRG solid state relays. The NRG also performs internal operations related to the setup and maintenance of the NRG bus chain as well as monitoring the communication status. To facilitate communication via different communication protocols, the NRG Controller is currently available with a Modbus RTU interface for serial networks or PROFINET for ethernet based networks.

NRG Solid State Relays


The NRG solid state relays are the switching devices that integrate monitoring circuitry and a communication interface through which measurement data and diagnostics can be exchanged with the machine controller. They are available with and without heatsink. Each NRG solid state relay on the bus chain is uniquely identified and automatically addressed on initial start-up.

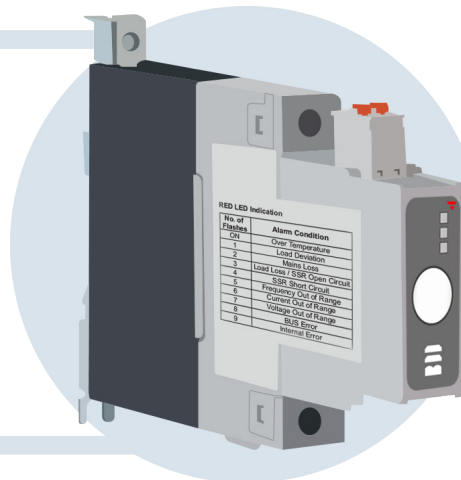


NRG Bus Cable

The NRG bus cable is a 5-way proprietary cable used for the internal BUS between the NRG controller and the NRG solid state relays on the bus chain. Apart from the data and supply lines, the NRG cable is equipped with an additional wire utilised for the auto-addressing of the NRG solid state relays on the bus chain.

Monitoring - A traditional system setup

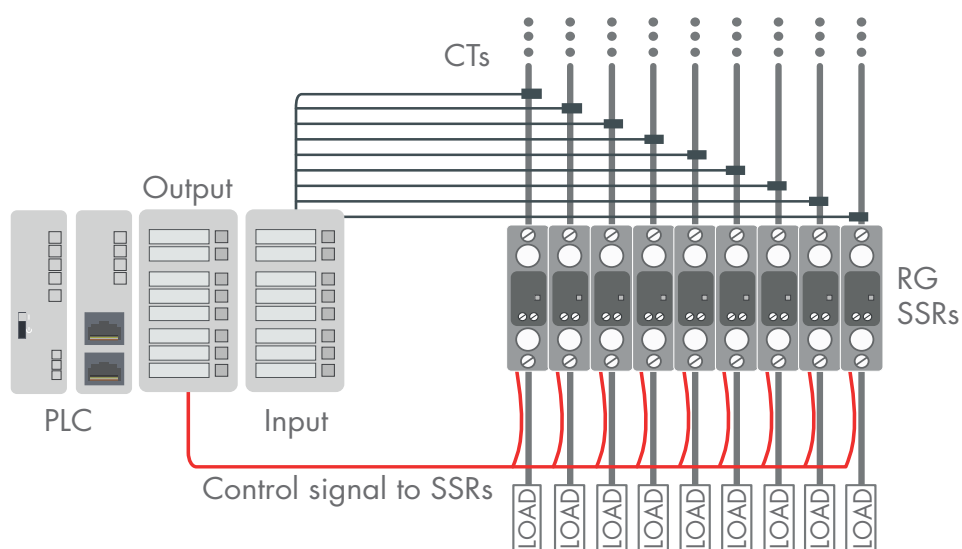

Real-time monitoring with the NRG

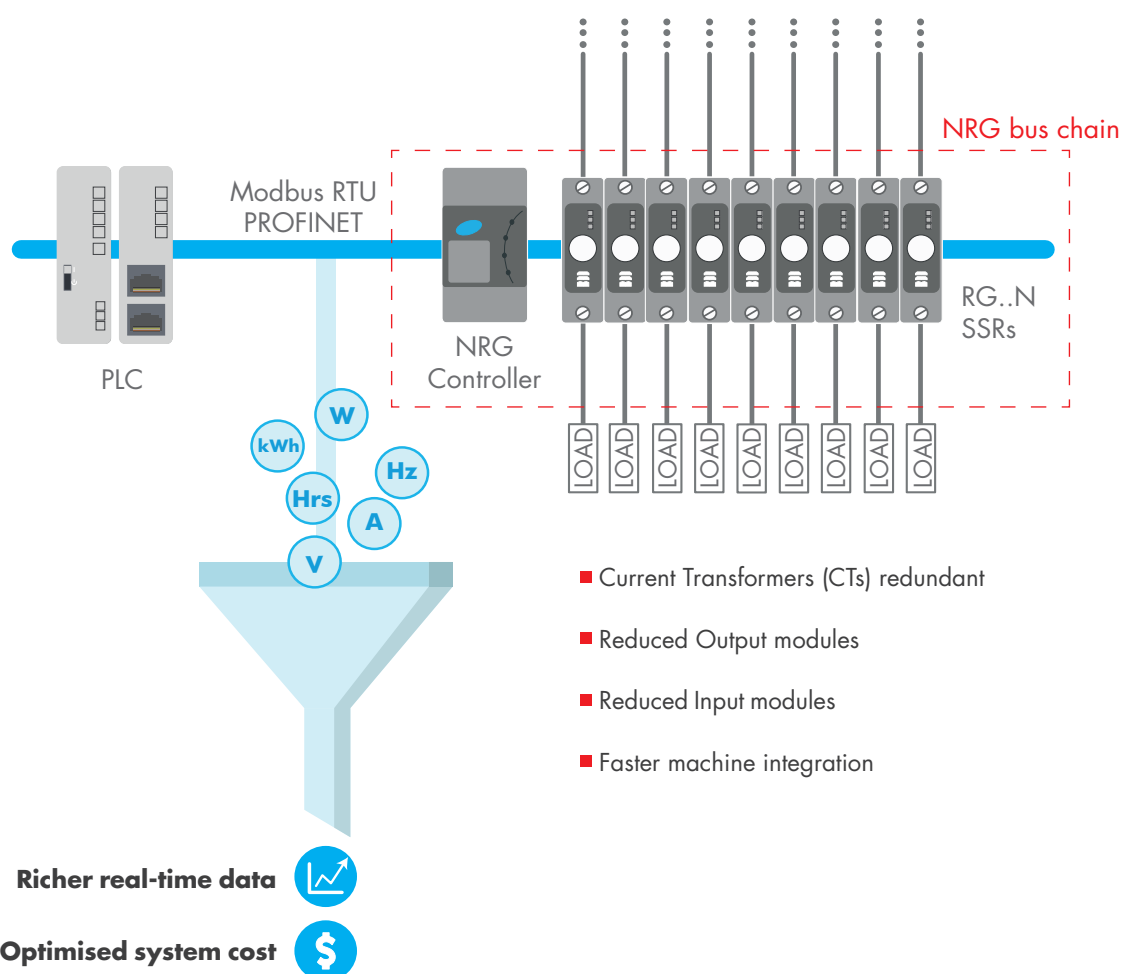


NRG series

Features

Diagnostics available with the NRG

If a failure occurs, it may not be possible for the automated process to maintain the set temperature profile. Quality of goods being produced is compromised and the machine must be shut down. Machine downtime related to these failures can be eliminated or reduced by utilizing NRG parameters associated to the status of the solid state relay and other relevant accessible data.

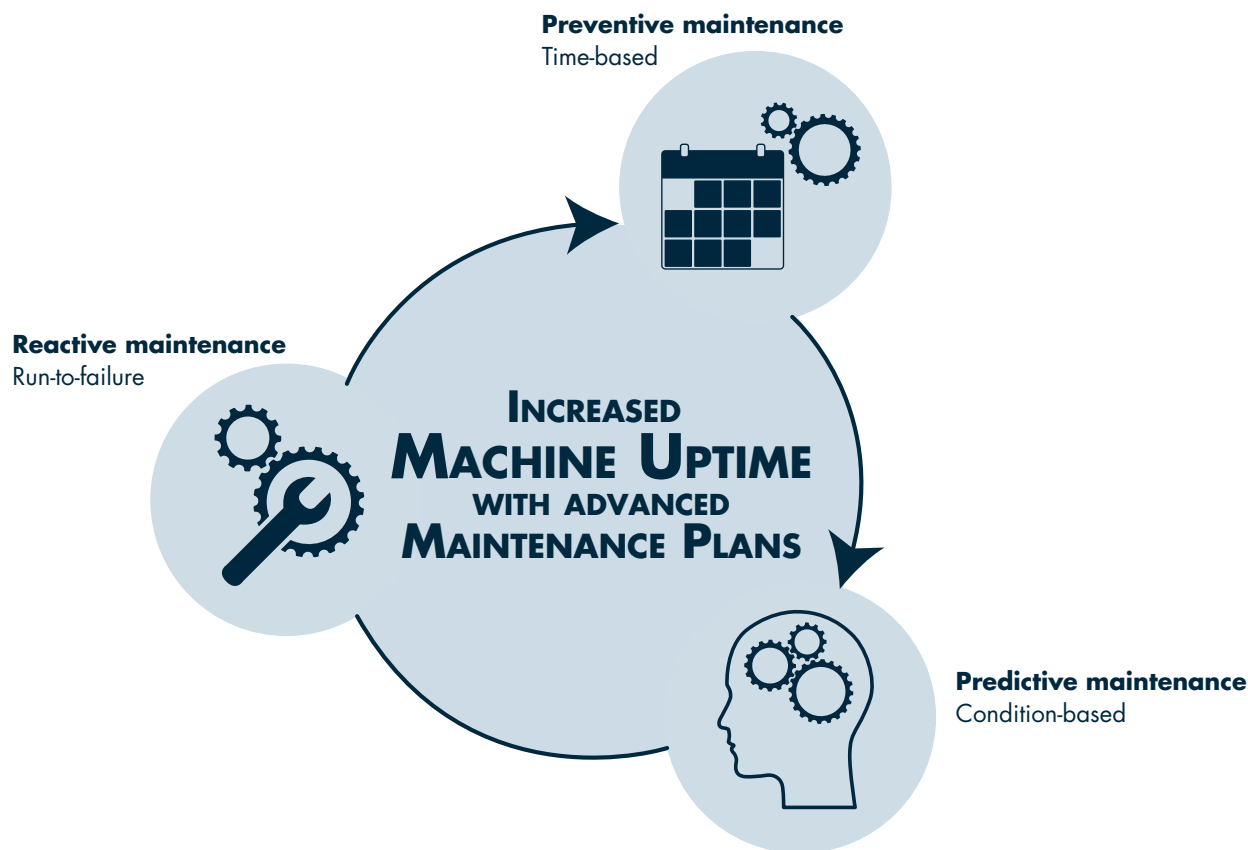

Reactive maintenance

To cater for sudden unpredictable failures, the NRG solid state relays are equipped with a number of alarms that monitor the system, the load, the SSR and also the communication system. These include:

- Load loss
- Mains loss
- SSR short circuit
- SSR open circuit
- Overtemperature
- SSR internal error
- Communication error

Preventive maintenance

The NRG solid state relays also offers a number of alarms to track system parameters which land themselves well into an efficient machine preventive maintenance plan. Such information includes:

- Current out of range
- Voltage out of range
- Frequency out of range
- Over temperature pre-warning
- Load running hours
- SSR running hours

Predictive maintenance

A possible way to predict a heater failure is through the change in resistance over its lifetime. With the NRG it is possible to continuously monitor the heater resistance by using accessible current and voltage measurements from the solid state relay and alert the machine controller if the measured resistance deviation is out of the set bounds via the

- Load Deviation alarm

The reference voltage and current to be used for the resistance monitoring can be recorded automatically via a 'TEACH' command and stored in the solid state relay


Selectable switching modes

The NRG solid state relays can be controlled via the communication interface. The basic switching mode is 'ON/OFF' which is a direct replacement of the PLC output modules therefore the temperature algorithm output can be redirected via the communication interface without the need of any changes. It is also possible to control the NRG solid state relays externally via the digital input terminal. The selection of the switching mode is done via the communication interface.

The NRG solid state relays incorporate also % power control methods whereby the solid state relay can be controlled directly via the % output of the temperature control algorithm in the PLC. Thus, eliminating the need for the output to be pulse width modulated. The available % power control switching modes are Burst, Distributed and Advanced full cycle.


Burst switching

The Burst switching mode offers the flexibility to change the switching time-base according to the needs of the application. The percentage ON time is the portion of the timebase that the SSR output will be ON. The switching resolution depends on the selected timebase. With Burst switching low harmonics/emissions are experienced.

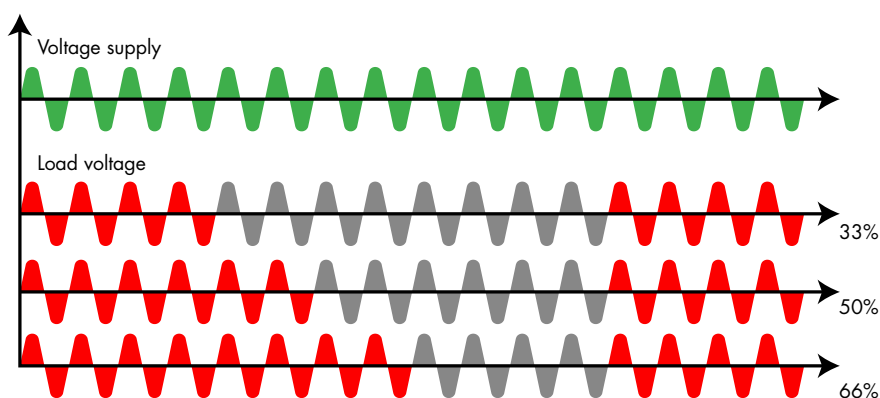


Distributed full cycle switching

The Distributed switching mode works with a fixed timebase whereby the % control level from the PLC translates to an even distribution of ON cycles over the timebase. More frequent switching results into a reduction in thermal overshoots which can be detrimental to the lifetime of both the heater and the SSR.

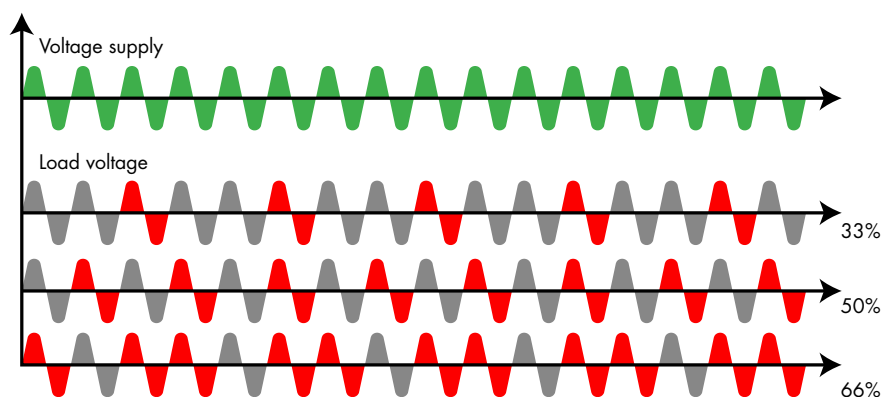

Advanced full cycle switching

Working on the same principle of the Distributed, the Advanced full cycle mode distributes half cycles evenly over the timebase according to the % control level from the PLC. This switching mode is ideal for Short Wave Infrared Heaters due to the reduction in visual flickering synonymous with such heaters.

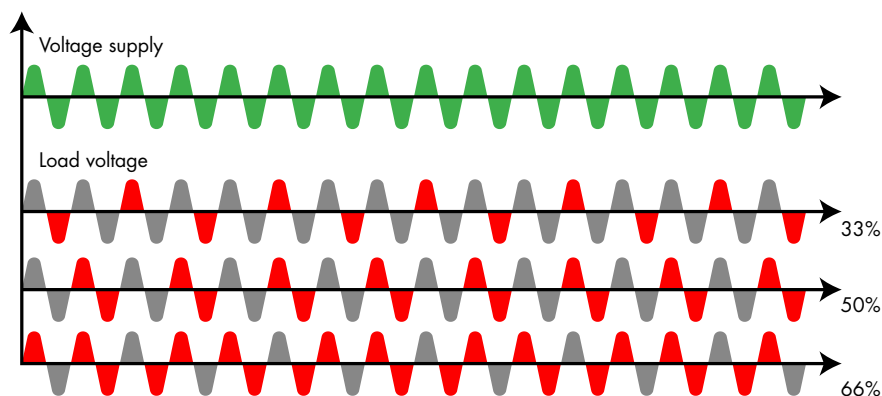


NRG series


Overview

Product structure

NRG Solid State Relay

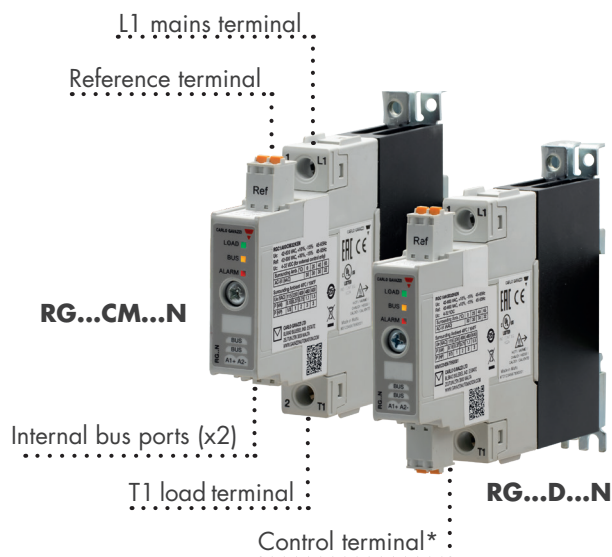

NRG Controller

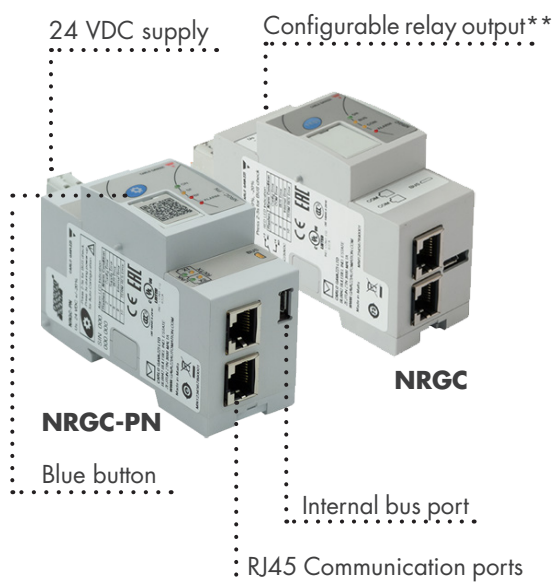

The heatsink is integrated in the RGC version only

* Available with RG...D...N only

** NRGC only

NRG bus chain possible combinations




NRG Controller



NRGC

NRG Solid State Relay



RG..D..N (max. 48)
RG..CM..N (max. 32)




NRG Controller



NRGC-PN

NRG Solid State Relay



RG..CM..N (max. 32)

Selection guide

NRG Solid State Relay

Switching	External control	•	•
	Switching via communication		•
	ON / OFF		•
	Distributed full cycle		•
	Advanced full cycle		•
	Phase angle		
	Soft start		
Diagnostics	Load deviation monitoring		•
	Load loss alarm	•	•
	System diagnostics	•	•
	SSR diagnostics	•	•
	Parameters out of range	•	•
	Over temperature protection	•	•
Measurement	Current measurement (A)	•	•
	Voltage measurement (V)	•	•
	Frequency measurement (Hz)	•	•
	Power measurement (W, VA)	•	•
	SSR running hours (Hours)	•	•
	Load running hours (Hours)		•
	Energy consumption (kWh)	•	•
References	Versions w. integrated heatsink		
	25 AAC @ 40°C	RGC1A60D25KEN	RGC1A60CM25KEN
	32 AAC @ 40°C	RGC1A60D32KEN	RGC1A60CM32KEN
	37 AAC @ 40°C	RGC1A60D32GEN	RGC1A60CM32GEN
	43 AAC @ 40°C	RGC1A60D42GEN	RGC1A60CM42GEN
	65 AAC @ 40°C	RGC1A60D62GEN	RGC1A60CM62GEN
	Versions without heatsink		
	50 AAC	RGS1A60D50KEN	RGS1A60CM50KEN
	90 AAC	RGS1A60D92XEN	RGS1A60CM92XEN
BUS	Max. number of RG..Ns on bus chain	48	32
Specifications	Max. rated voltage	660 VAC	660 VAC
	I ² t rating	up to 18000 A²s	up to 18000 A²s
	Dimensions (W x H x D mm)		
	RGC..25, 32	17.8 x 110 x 134	17.8 x 110 x 134
	RGC..42	35 x 110 x 172	35 x 110 x 172
	RGC..62	70 x 110 x 172	70 x 110 x 172
	RGS..	17.8 x 90 x 82	17.8 x 90 x 82

NRG Controller

Features	Communication interface	Modbus RTU	PROFINET
	Power supply	24 VDC	24 VDC
	Auxiliary digital output (EMR)	•	
	References	NRGC	NRGC-PN

NRG Internal Bus cables

References	Cable length	
	10 cm	RCRGN-010-2*
	75 cm	RCRGN-075-2
	150 cm	RCRGN-150-2
	350 cm	RCRGN-350-2
	500 cm	RCRGN-500-2

XEN = KEN for screw power terminals

XEN = GEN for box clamp power terminals

*Packed by 4 pcs.

Further details are available on online datasheets at www.gavazziautomation.com

OUR SALES NETWORK IN EUROPE

AUSTRIA

Carlo Gavazzi GmbH
Ketzergrasse 374,
A-1230 Wien
Tel: +43 1 888 4112
Fax: +43 1 889 10 53
office@carlogavazzi.at

BELGIUM

Carlo Gavazzi NV/SA
Mechelsesteenweg 311,
B-1800 Vilvoorde
Tel: +32 2 257 4120
Fax: +32 2 257 41 25
sales@carlogavazzi.be

DENMARK

Carlo Gavazzi Handel A/S
Over Hadstenvej 40,
DK-8370 Hadsten
Tel: +45 89 60 6100
Fax: +45 86 98 15 30
handel@gavazzi.dk

FINLAND

Carlo Gavazzi OY AB
Ahventie, 4 B
FI-02170 Espoo
Tel: +358 9 756 2000
myynti@gavazzi.fi

FRANCE

Carlo Gavazzi Sarl
Zac de Paris Nord II, 69, rue de la Belle Etoile,
F-95956 Roissy CDG Cedex
Tel: +33 1 49 38 98 60
Fax: +33 1 48 63 27 43
french.team@carlogavazzi.fr

GERMANY

Carlo Gavazzi GmbH
Pfnorstr. 10-14
D-64293 Darmstadt
Tel: +49 6151 81000
Fax: +49 6151 81 00 40
info@gavazzi.de

GREAT BRITAIN

Carlo Gavazzi UK Ltd
4.4 Frimley Business Park,
Frimley, Camberley, Surrey GU16 7SG
Tel: +44 1 276 854 110
Fax: +44 1 276 682 140
sales@carlogavazzi.co.uk

ITALY

Carlo Gavazzi SpA
Via Milano 13,
I-20045 Lainate
Tel: +39 02 931 761
Fax: +39 02 931 763 01
info@gavazziacbu.it

NETHERLANDS

Carlo Gavazzi BV
Wijkmeeweg 23,
NL-1948 NT Beverwijk
Tel: +31 251 22 9345
Fax: +31 251 22 60 55
info@carlogavazzi.nl

NORWAY

Carlo Gavazzi AS
Melkeveien 13,
N-3919 Porsgrunn
Tel: +47 35 93 0800
Fax: +47 35 93 08 01
post@gavazzi.no

PORTUGAL

Carlo Gavazzi Lda
Rua dos Jerónimos 38-B,
P-1400-212 Lisboa
Tel: +351 21 361 7060
Fax: +351 21 362 13 73
carlogavazzi@carlogavazzi.pt

SPAIN

Carlo Gavazzi SA
Avda. Iparraguirre, 80-82,
E-48940 Leioa (Bizkaia)
Tel: +34 94 480 4037
Fax: +34 94 431 6081
gavazzi@gavazzi.es

SWEDEN

Carlo Gavazzi AB
V:a Kyrkogatan 1,
S-652 24 Karlstad
Tel: +46 54 85 1125
Fax: +46 54 85 11 77
info@carlogavazzi.se

SWITZERLAND

Carlo Gavazzi AG
Verkauf Schweiz/Vente Suisse
Sumpfstrasse 3,
CH-6312 Steinhausen
Tel: +41 41 747 4535
Fax: +41 41 740 45 40
info@carlogavazzi.ch

OUR SALES NETWORK IN THE AMERICAS

USA

Carlo Gavazzi Inc.
750 Hastings Lane,
Buffalo Grove, IL 60089, USA
Tel: +1 847 465 6100
Fax: +1 847 465 7373
sales@carlogavazzi.com

CANADA

Carlo Gavazzi Inc.
2660 Meadowvale Boulevard,
Mississauga, ON L5N 6M6, Canada
Tel: +1 905 542 0979
Fax: +1 905 542 22 48
gavazzi@carlogavazzi.com

MEXICO

Carlo Gavazzi Mexico S.A. de C.V.
Circuito Puericultores 22, Ciudad Satelite
Nauclan de Juarez, Edo Mex. CP 53100
T: +52 55 5373 7042
F: +52 55 5373 7042
mexicosales@carlogavazzi.com

BRAZIL

Carlo Gavazzi Automação Ltda.
Av. Francisco Matarazzo, 1752
Conj 2108 - Barra Funda - São Paulo/SP
Tel: +55 11 3052 0832
Fax: +55 11 3057 1753
info@carlogavazzi.com.br

OUR SALES NETWORK IN ASIA AND PACIFIC

SINGAPORE

Carlo Gavazzi Automation Singapore Pte. Ltd.
61 Tai Seng Avenue #05-06
Print Media Hub @ Paya Lebar iPark
Singapore 534167
Tel: +65 67 466 990
Fax: +65 67 461 980
info@carlogavazzi.com.sg

MALAYSIA

Carlo Gavazzi Automation (M) SDN. BHD.
D12-06-G, Block D12,
Pusat Perdagangan Dana 1,
Jalan PJU 1A/46, 47301 Petaling Jaya,
Selangor, Malaysia.
Tel: +60 3 7842 7299
Fax: +60 3 7842 7399
info@gavazzi-asia.com

CHINA

Carlo Gavazzi Automation
(China) Co. Ltd.
Unit 2308, 23/F.,
News Building, Block 1, 1002
Middle Shennan Zhong Road,
Shenzhen, China
Tel: +86 755 83699500
Fax: +86 755 83699300
sales@carlogavazzi.cn

HONG KONG

Carlo Gavazzi Automation
Hong Kong Ltd.
Unit No. 16 on 25th Floor, One
Midtown,
No. 11 Hoi Shing Road, Tsuen Wan,
New Territories, Hong Kong
Tel: +852 26261332 / 26261333
Fax: +852 26261316

OUR COMPETENCE CENTRES AND PRODUCTION SITES

DENMARK

Carlo Gavazzi Industri A/S
Hadsten

CHINA

Carlo Gavazzi Automation (Kunshan) Co., Ltd.
Kunshan

MALTA

Carlo Gavazzi Ltd
Zejtun

ITALY

Carlo Gavazzi Controls SpA
Belluno

LITHUANIA

Uab Carlo Gavazzi Industri Kaunas
Kaunas

HEADQUARTERS

Carlo Gavazzi Automation SpA
Via Milano, 13
I-20045 - Lainate (MI) - ITALY
Tel: +39 02 931 761
info@gavazziautomation.com



CARLO GAVAZZI
Automation Components

Energy to Components!

www.gavazziautomation.com

